


# HVHZ IMPACT RATED

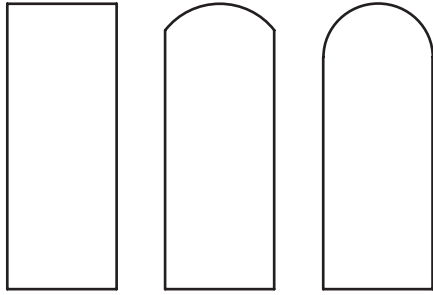

**E-01**

**E-01B**

**E-01C\***

## Maximum Frame Size:

39-1/4" x 126-1/16"

## Maximum Door Size:

3'0" x 10'0"

## Multipoint Locking System:

- Ashland Multipoint
- GU Secury 3-Point Lock\*


## Florida Codes

- FL# 21873.4 (Inswing)
- FL# 21873.5 (Outswing)

## NOA Codes

- 20-1130.02 (Inswing)
- 20-1130.01 (Outswing)
- 20-1130.04 (IS, Solid Panel)
- 20-1130.03 (OS, Solid Panel)

★ Configuration only available through custom order

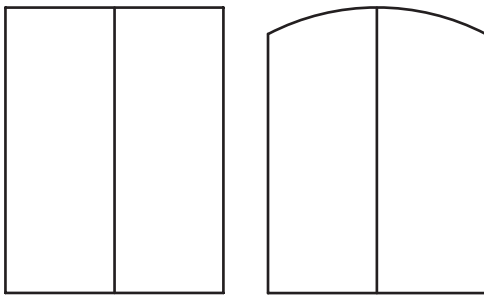

**E-04**

**E-17**

## Maximum Frame Size:

76" x 126-1/16"

## Maximum Door Size:

6'0" x 10'0"

## Multipoint Locking System:

- Ashland Multipoint  
*Active & Passive Lock*

## Florida Codes

- FL# 21873.4 (Inswing)
- FL# 21873.5 (Outswing)

## NOA Codes

- 20-1130.02 (Inswing)
- 20-1130.01 (Outswing)
- 20-1130.04 (IS, Solid Panel)
- 20-1130.03 (OS, Solid Panel)

Full-View Doors with Arched Glass (*Clearwater Series*) are NOT HVHZ Impact certified.

DSA Impact Rated Doors approved for High Velocity Hurricane zones are available Standard (through our Port Collection) or custom ordered. HVHZ Certification must be specified at the time of order to ensure proper certification for Stock & Custom Impact doors.

Custom Door sizes must not exceed the maximum sizes listed. Sidelites and/or transoms are not currently certified for HVHZ Impact Rated Units.

\*GU Secury 3-Point Lock is only certified for Single HVHZ Doors. The locking system must be paired with lever handles (Emtek Configuration #4), the Berkely Thumbblatch with Interior Lever, or the Belcanto Lever with the Danalock V3 smart lock. Half-Round Single Doors (E-01C) are only available with this locking system and are not compatible with the Ashland Multipoint.